



Network

Positioning

TNU-4051T

VGA Thermal Positioning Camera



Key Features


- Max. 640 x 480 resolution support
- Built-in 35mm fixed lens
- H.265, H.264, MJPEG codec, WiseStreamII support
- Max. 30fps@all resolutions (H.265, H.264)
- microSD/SDHC/SDXC memory slot (Max. 256GB)
- 24V AC, NEMA 4X

※ Bridge firmware is required to upgrade from 1.00~1.2X versions to the latest version.
For more details, please refer to the [UPGRADE NOTIFICATION] or [Release Note]
included with your firmware (ZIP file).

Compatible Accessories (Optional)



SBU-500WM

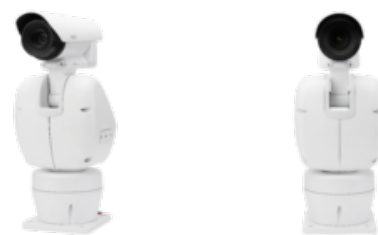

TNU-4051T

VGA Thermal Positioning Camera

Specifications

| | |
|-----------------------------|---|
| Video | |
| Imaging Device | Uncooled micro bolometer |
| Resolution | 640x480, 640x360, 320x240 |
| Max. Framerate | H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz) |
| NETD | <50mK |
| Pixel size | 17μm |
| Video Out | CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation |
| Lens | |
| Focal Length (Zoom Ratio) | 35mm fixed focal |
| Max. Aperture Ratio | F1.0 |
| Angular Field of View | H: 17.2° / V: 13° / D: 22° |
| Min. Object Distance | 36m(118.11ft) |
| Focus Control | Fixed |
| Pan / Tilt / Rotate | |
| Pan Range | 360° Endless |
| Pan Speed | 0.025°~120°/sec |
| Tilt Range | -90° ~40° |
| Tilt Speed | 0.025°~40°/sec |
| Sequence | Preset(300ea), Group(6ea) |
| Preset Accuracy | ±0.3° |
| Operational | |
| Camera Title | Displayed up to 85 characters |
| Direction Indicator | Support |
| Digital Image Stabilization | Support(built-in gyro sensor) |
| Motion Detection | 8ea, 8point polygonal zones |
| Analytics | Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Temperature change detection, Sound classification, Shock detection |
| Alarm I/O | Input 1ea / Output 1ea |
| Alarm Triggers | Analytics, Network disconnect, Alarm input |
| Alarm events | File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output PTZ Preset |
| Audio In | Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm |
| Audio Out | Line out, Max.output level: 1Vrms |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com

Hanwha Vision is formerly known as Hanwha Techwin.

| | |
|----------------|---|
| Color Palettes | Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom |
|----------------|---|

| | |
|-----------------------------------|---|
| Network | |
| Ethernet | RJ-45(10/100BASE-T) |
| Video Compression | H.265/H.264: Main/Baseline/High, MJPEG |
| Audio Compression | G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz |
| Smart Codec | WiseStream II |
| Bitrate Control | H.264/H.265: CBR or VBR MJPEG: VBR |
| Streaming | Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles) |
| Protocol | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP, SRTSP |
| Security | HTTPS(SSL) login authentication Digest login authentication IP address filtering User access log 802.1X authentication(EAP-TLS, EAP-LEAP) |
| Application Programming Interface | ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform |

| | |
|------------------|--|
| General | |
| Webpage Language | English, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek |
| Edge Storage | Micro SD/SDHC/SDXC 1slot 256GB |
| Memory | 1024MB RAM, 256MB Flash |

| | |
|----------------------------------|---|
| Environmental & Electrical | |
| Operating Temperature / Humidity | -40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH |
| Storage Temperature / Humidity | -50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH |
| Certification | IP66, NEMA4X |
| Input Voltage | 24VAC |
| Power Consumption | 24VAC: Max 84W(Heater on), Max 62W(Heater off) |

| | |
|-----------------------------|--|
| Mechanical | |
| Color / Material | White / Aluminum |
| RAL Code | RAL9003 |
| Product Dimensions / Weight | (W)219×(H)528×(D)335mm(8.62x20.79x13.19"), 11.7Kg(25.79lb) |