


# SWEEPER-W

The Sweeper-W speed gate offers an ideal solution for spaces that demand a perfect blend of contemporary aesthetics and functionality.

With its wider passage, this model facilitates the smooth movement of individuals with limited mobility, those carrying luggage or strollers, and even serves as an additional emergency exit when needed. The sleek design, featuring glass top and side panels, not only enhances transparency but also makes it an excellent fit for the most sophisticated building entrances.

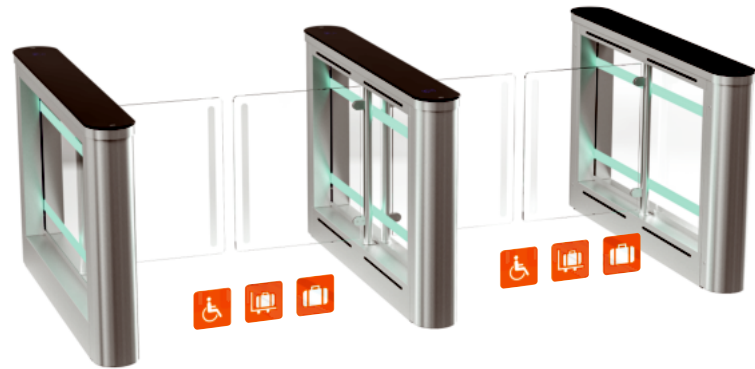

## PERFECT SOLUTION COMBINES FUNCTIONALITY WITH CONTEMPORARY AESTHETICS DESIGN

**900  
1200**  
mm  
PASSAGE  
WIDTH

**30  
20**  
pers./min  
SINGLE ACCESS  
FLOW RATE

**60**  
pers./min  
FREE ACCESS  
FLOW RATE

**0,6  
0,9**  
sec  
OPENING / CLOSING

**IP 41**  
PROTECTIVE LEVEL

**ANTI-TAILGATING**

**BI-DIRECTIONAL**

**ACCESS CONTROL  
SYSTEM**

**MANUAL  
CONTROL**

### Key features:

- BMDrive® - a reliable mechanism with a powerful BLDC gear motor ensures long-term, maintenance-free operation
- The speed gate is equipped with a smart self-diagnostic system
- An innovative controller with an OLED display and buttons allows for easy setup and configuration without the need for special programmers
- Digital control of force and leaf speed, combined with safety sensors, prevents accidents and ensures the safety of individuals, even in cases of unauthorized passage
- The sensor system enables the detection of individuals with luggage or allows for a free exit without the need for identification
- Elegant cabinets come equipped with integrated LED lighting that displays the access status and card reader area
- The housing design and top lid can be customized to meet specific preferences
- Can be seamlessly integrated with any type of access control system
- A wired remote control panel is included as part of the standard kit
- Low power consumption
- In the event of a power failure, the leaves can be manually opened (fail-safe)



www.tiso.global  
+380 (44) 291-21-11  
e-mail: sales@tiso.global



**Technical Specifications:**


Model	Sweeper-W 900	Sweeper-W 1200
Cabinet width, mm	208	
Cabinet length, mm	1658	
Cabinet height, mm	1010	
Passage width, mm	900	1200
Opening/closing time, sec	0,6	0,9
Mechanism	BMDrive® servodrive (BLDC)	
Blocking system	ToothLock®	
Emergency mode (fire-alarm)	Free entry/exit (leaves are opened automatically)	
Power fail	Fail safe (gates could be opened manually — standard)	
MCBF, cycles	5 000 000	

**Electrical Specifications:**

Maximum power consumption, W	160
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V
Indication	DotLights®, RFIDLights®, EdgeLights®

**Finishing**

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

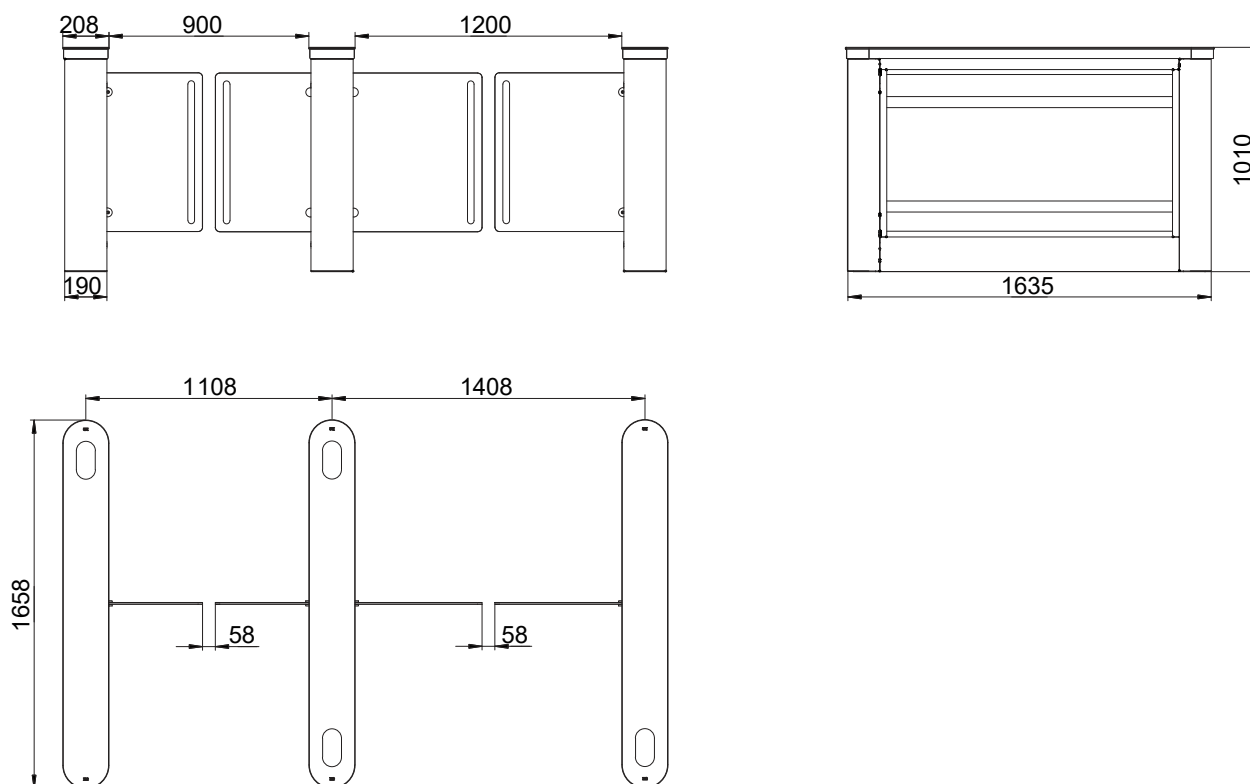

Dimensions for solid glass top lid

Specifications are subject to change without prior notice.



www.tiso.global  
+380 (44) 291-21-11  
e-mail: sales@tiso.global

